


REKO wedge wire screen panels

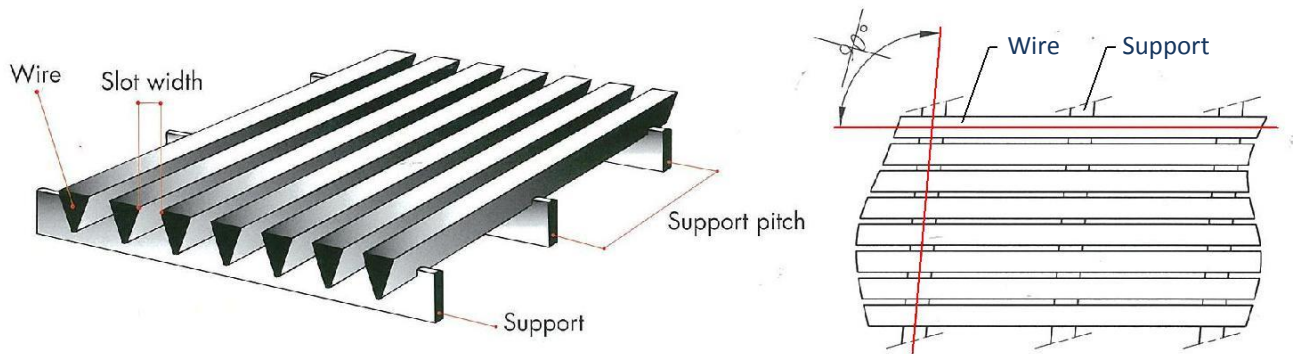

Note : The angle between the wires and supports is not 90°!

Normal construction

Panel size : 2600 x 1900 // mm.
 Wire length = Slot length : 1900 // mm.
 Support length : 2600 mm.
 Material : AISI 304.

Slot width	Wire (W x H)	Support (W x H)	Support pitch	Open area
• 0.15 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	9 %
• 0.25 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	14 %
• 0.5 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	25 %
• 0.75 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	33 %
• 1.0 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	40 %
• 1.75 mm	1.5 x 2.5 mm	3 x 5 mm	25 mm	54 %
• 2.5 mm	2.3 x 3.6 mm	3 x 5 mm	25 mm	52 %
• 3.0 mm	2.3 x 3.6 mm	3 x 5 mm	25 mm	57 %
• 4.0 mm	2.3 x 3.6 mm	3 x 5 mm	25 mm	63 %

Heavy construction

Panel size : 2600 x 1800 // mm.
 Wire length = Slot length : 1800 // mm.
 Support length : 2600 mm.
 Material : AISI 304.

Slot width	Wire (W x H)	Support (W x H)	Support pitch	Open area
• 0.15 mm	1.8 x 3.7 mm	3 x 5 mm	16.3 mm	8 %
• 0.25 mm	1.8 x 3.7 mm	3 x 5 mm	16.3 mm	12 %
• 0.5 mm	1.8 x 3.7 mm	3 x 5 mm	16.3 mm	22 %
• 0.75 mm	1.8 x 3.7 mm	3 x 5 mm	16.3 mm	29 %
• 1.0 mm	1.8 x 3.7 mm	3 x 5 mm	16.3 mm	36 %